


Thank you for purchasing the X6 charger. Designed for both rookies and professionals, this system is extremely versatile, it is best used and very safe for you, please read this manual carefully.

## Battery Conntion

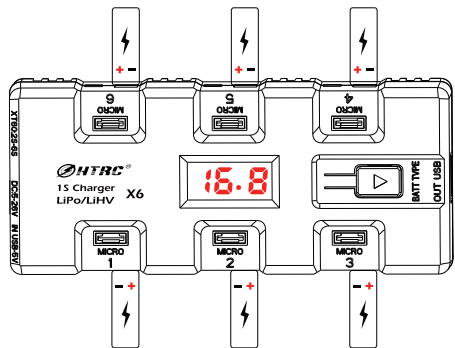

## 6 channel charger for LiPo/LiHv

Suitable for charging 3.7V lithium battery and 3.85V high voltage lithium battery



## Operation steps

- ① Plug in the DC 5-26V power supply, 6 green led lights always flash.
- ② Press the button to select the battery type according to the display O-L(Lipo)/O-H(LiHv), After selecting, long press the button, the buzzer will sound three times.
- ③ Connect the battery, start charging, the corresponding light is always bright red, and always bright green when full.

## SPECIFICATION

DC 5.5mm input range	5.0-26.0V@24W
Batteries XT60 input range	5.0-26.0V@2-6SLipo
Micro usb input range	5V@ 1A/2A/2.4A
Charge power	Max.4Wx6,±10%
Charge current	1.0Ax6, ±10%
Battery type	Lipo/LiHv(4.2V/4.35V)
Battery cell count	1cell
Batteries XT60 over discharge voltage	automatic protection
End of charge voltage	{4.20V±1%} {4.35V±1%}
Support battery port	Micro,MX,mCPX,JST
USB output	5V@2.4A/2.0A/1.0A intelligent fast charging port(DC/XT60 input)
Indication	LED Digital tube display
Dimension	118x50x21mm
Net weight	0.60Kg

## FEATURES

- Simple operation,plug and play.
- Six independent ports can be used at the same time.
- DC 5.5mm/Batteries XT60/Micro usb three input modes.
- Charge current is 1A.
- LED digital tube display real-time indicates the battery charger voltage.
- Maximum protection:battery reverse polarity protection,battery over voltage protection and DC input voltage protection.



Made in China